
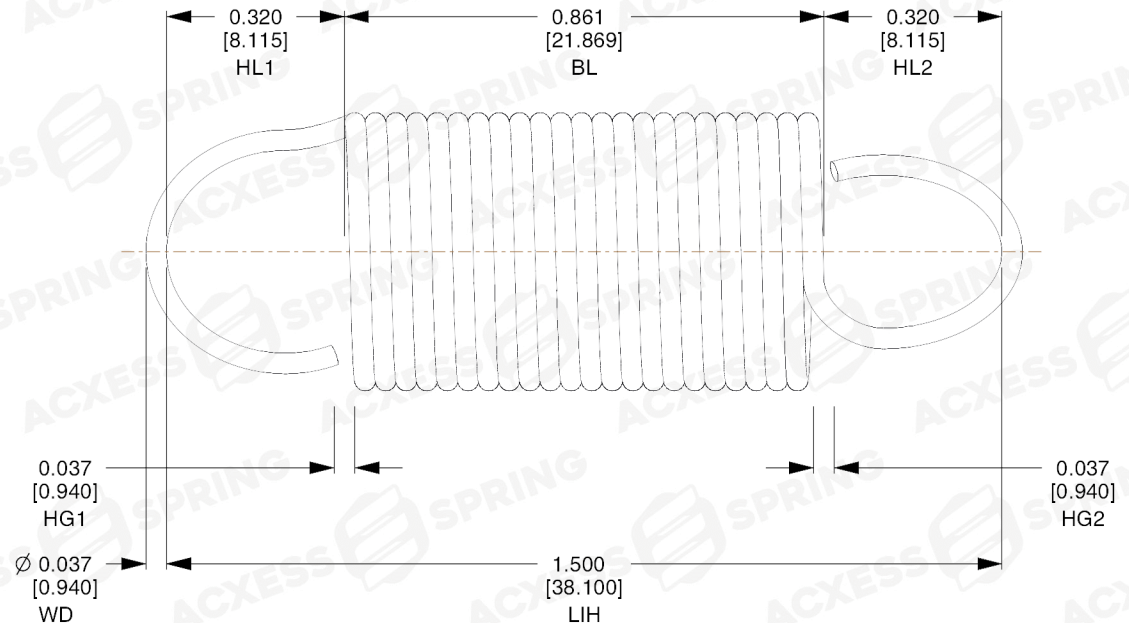
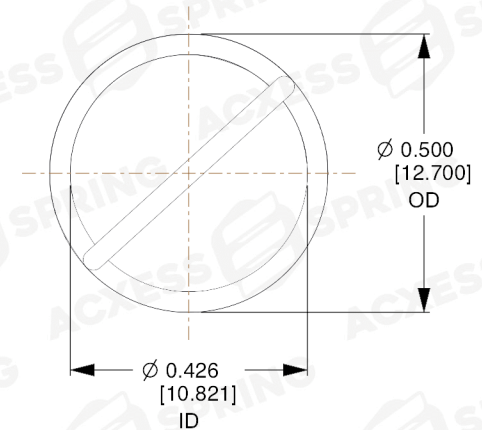


Part Name:	Date: 06/02/2026
Part #: in (Click to see Part # on Website)	PE037-500-22271-SST-1500-MH-N-IN 🔗
Spring Type: Extension Spring	End Type: Machine Hook
Finish: None	Direction of Wind: Right Hand
Material: Stainless 302 ASTM A313	Spring Index (I): 12.514
Weight / M: 10.688 Lbs	Length of W: 34.394 in

Physical Dimensions	IN	MM	Tolerances (in)
Wire Diameter (WD)	0.037 in	[0.940 mm]	+/- 0.001
Outer Diameter (OD)	0.500 in	[12.700 mm]	+/- 0.008
Mean Diameter (MD)	0.463 in	[11.760 mm]	+/- 0.008
Inner Diameter (ID)	0.426 in	[10.820 mm]	+/- 0.008
Length Inside Hooks (LIH)	1.500 in	[38.100 mm]	+/- 0.050
Body Length (BL)	0.861 in	[21.869 mm]	+/- 0.025
Hook Gap 1 (HG1)	0.037 in	[0.940] mm	
Hook Gap 2 (HG2)	0.037 in	[0.940] mm	
Hook Length 1 (HL1)	0.320 in	[8.128] mm	
Hook Length 2 (HL2)	0.320 in	[8.128] mm	
Total Hook Length (THL)	0.639 in	[16.231] mm	

Spring Rate (K)	1.05451 lbs/in	0.185 N/mm	+/- 0.105
Max Load (ML)	4.162 lbf	18.514 N	+/- 0.416
Max Travel (MT)	3.575 in	90.813 mm	
Initial Tension (IT)	0.392 lbf	1.743 N	
Max Shear Stress Possible (t max)	131600.000 PSI	907350059.759 Pa	
Material Shear Modulus (G)	9949475.938 PSI	68599221788.087 Pa	
Wahl Correction Factor (W)	1.114	1.114	

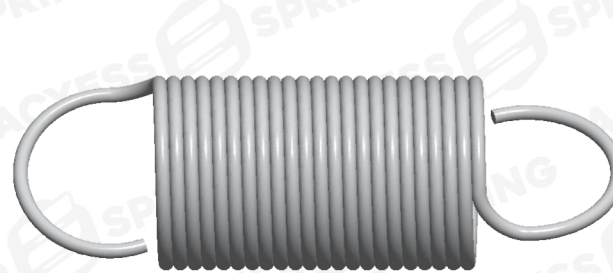

Note: Body Length, Total Coils, End Type and End Position is for reference only.

Notes	Scale: 2.900	Revision #:	Drawn By:	Approved By:
This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Acxess Spring makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specification.				This Drawing is the property of ACXESS SPRING It may contain confidential, proprietary information, that is Acxess Spring property. Do not disclose to or duplicate for others except as authorized by Acxess Spring.