


Part Name:	Date: 06/02/2026
Part #: in (Click to see Part # on Website)	PE041-500-9098-SST-1250-CO-N-IN 
Spring Type: Extension Spring	End Type: Cross-Over Hook
Finish: None	Direction of Wind: Right Hand
Material: Stainless 302 ASTM A313	Spring Index (I): 11.195
Weight / M: 6.426 Lbs	Length of W: 16.839 in

Physical Dimensions	IN	MM	Tolerances (in)
Wire Diameter (WD)	0.041 in	[1.041 mm]	+/- 0.001
Outer Diameter (OD)	0.500 in	[12.700 mm]	+/- 0.008
Mean Diameter (MD)	0.459 in	[11.659 mm]	+/- 0.008
Inner Diameter (ID)	0.418 in	[10.617 mm]	+/- 0.008
Length Inside Hooks (LIH)	1.250 in	[31.750 mm]	+/- 0.050
Body Length (BL)	0.414 in	[10.516 mm]	+/- 0.015
Hook Gap 1 (HG1)	0.041 in	[1.041 mm]	
Hook Gap 2 (HG2)	0.041 in	[1.041 mm]	
Hook Length 1 (HL1)	0.418 in	[10.617 mm]	
Hook Length 2 (HL2)	0.418 in	[10.617 mm]	
Total Hook Length (THL)	0.836 in	[21.234 mm]	

Spring Rate (K)	3.99469 lbs/in	0.700 N/mm	+/- 0.399
Max Load (ML)	5.405 lbf	24.041 N	+/- 0.540
Max Travel (MT)	1.199 in	30.465 mm	
Initial Tension (IT)	0.614 lbf	2.729 N	
Max Shear Stress Possible (t max)	129250.000 PSI	891147380.120 Pa	
Material Shear Modulus (G)	9949475.938 PSI	68599221788.087 Pa	
Wahl Correction Factor (W)	1.129	1.129	

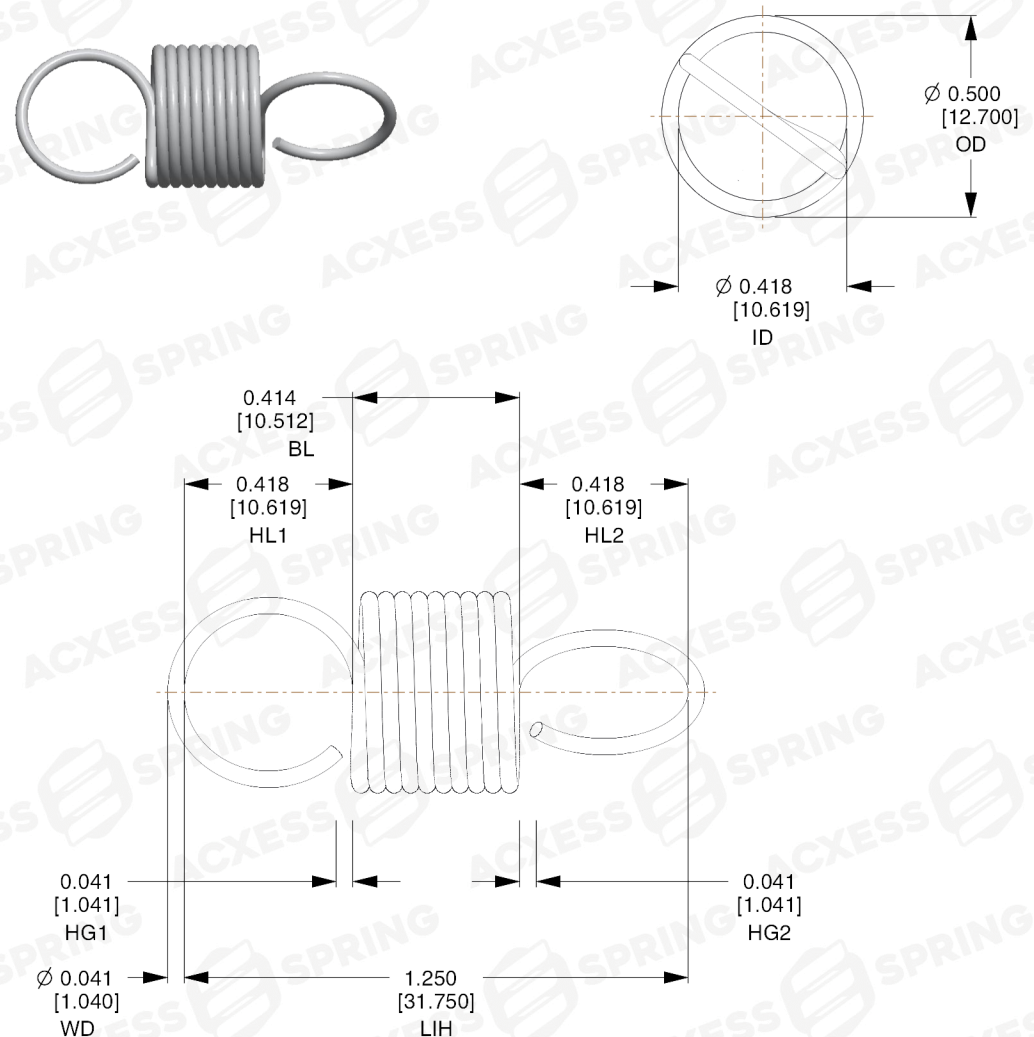

Note: Body Length, Total Coils, End Type and End Position is for reference only.

Notes	Scale: 2.100	Revision #:	Drawn By:	Approved By:
	This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Acxess Spring makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specification.			This Drawing is the property of ACXESS SPRING It may contain confidential, proprietary information, that is Acxess Spring property. Do not disclose to or duplicate for others except as authorized by Acxess Spring.