
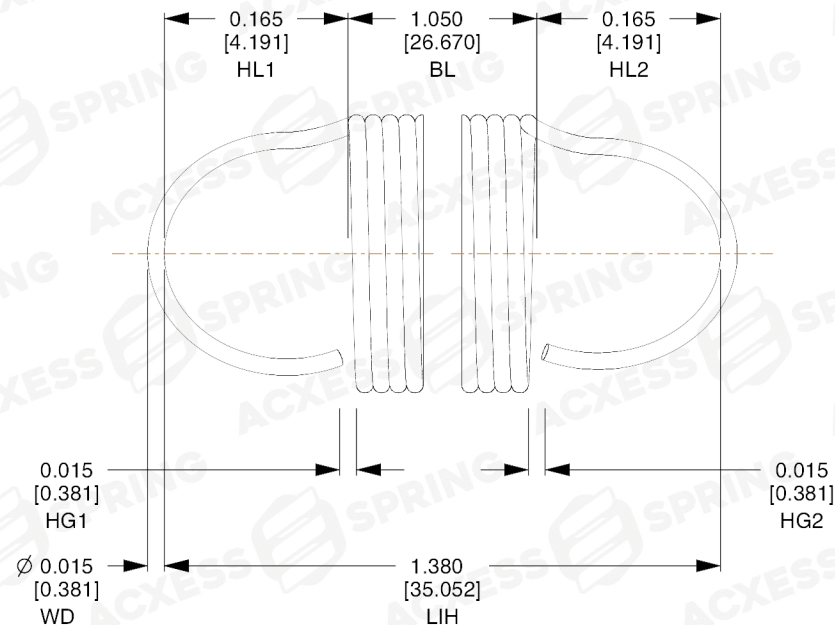
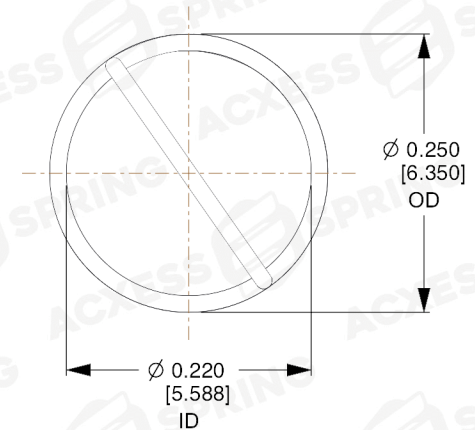


Part Name:	Date: 06/02/2026
Part #: in (Click to see Part # on Website)	PE015-250-69000-SST-1380-MH-N-IN 
Spring Type: Extension Spring	End Type: Machine Hook
Finish: None	Direction of Wind: Right Hand
Material: Stainless 302 ASTM A313	Spring Index (I): 15.667
Weight / M: 2.654 Lbs	Length of W: 51.956 in

Physical Dimensions	IN	MM	Tolerances (in)
Wire Diameter (WD)	0.015 in	[0.381 mm]	+/- 0.001
Outer Diameter (OD)	0.250 in	[6.350 mm]	+/- 0.005
Mean Diameter (MD)	0.235 in	[5.969 mm]	+/- 0.005
Inner Diameter (ID)	0.220 in	[5.588 mm]	+/- 0.005
Length Inside Hooks (LIH)	1.380 in	[35.052 mm]	+/- 0.050
Body Length (BL)	1.050 in	[26.670 mm]	+/- 0.050
Hook Gap 1 (HG1)	0.015 in	[0.381] mm	
Hook Gap 2 (HG2)	0.015 in	[0.381] mm	
Hook Length 1 (HL1)	0.165 in	[4.191] mm	
Hook Length 2 (HL2)	0.165 in	[4.191] mm	
Total Hook Length (THL)	0.330 in	[8.382] mm	

Spring Rate (K)	0.07031 lbs/in	0.012 N/mm	+/- 0.007
Max Load (ML)	0.616 lbf	2.738 N	+/- 0.062
Max Travel (MT)	8.254 in	209.659 mm	
Initial Tension (IT)	0.035 lbf	0.156 N	
Max Shear Stress Possible (t max)	145700.000 PSI	1004566137.590 Pa	
Material Shear Modulus (G)	9949475.938 PSI	68599221788.087 Pa	
Wahl Correction Factor (W)	1.090	1.090	

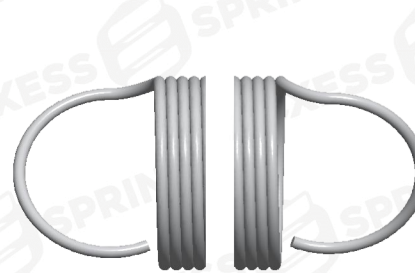

Note: Body Length, Total Coils, End Type and End Position is for reference only.

Notes	Scale: 5.800	Revision #:	Drawn By:	Approved By:
This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Acxess Spring makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specification.				This Drawing is the property of ACXESS SPRING It may contain confidential, proprietary information, that is Acxess Spring property. Do not disclose to or duplicate for others except as authorized by Acxess Spring.