
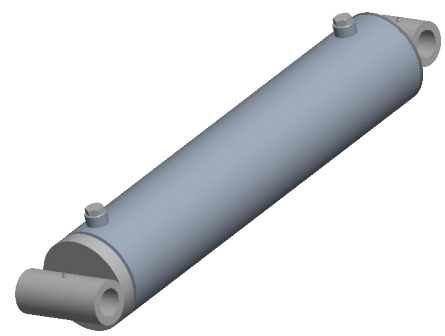
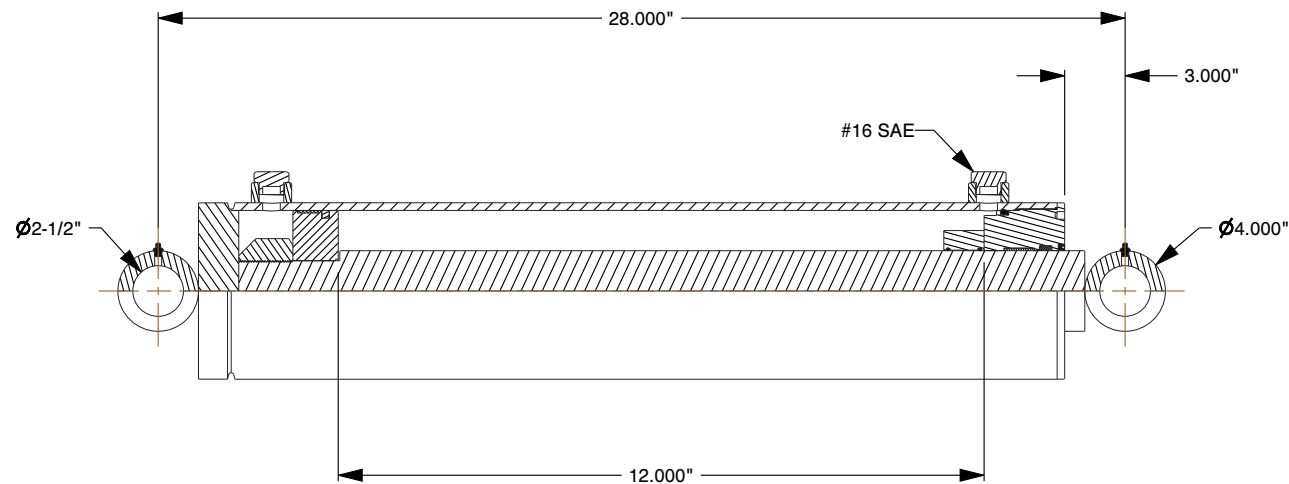


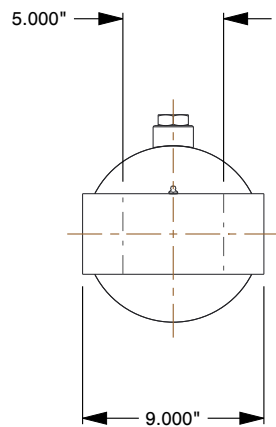

- Notes:
- 3000 PSI Maximum Operating Pressure
 - 3000 PSI Maximum Peak Spike Pressure
 - Welded Construction
 - 8" Bore size
 - Stroke sizes 12"
 - Skived tubing
 - Chromed, ground & polished piston rod
 - Ductile iron piston & thread-in gland
 - Teflon cap seal & wear ring on piston
 - Urethane u-cup, metal encased wiper & wear ring on piston
 - Crosstube end fittings
 - Color is Gloss Black

https://find3dcad.com/		THIRD ANGLE PROJECTION	
This file and the related information are provided for reference only and may change without notice. FIND 3D CAD does not guarantee the accuracy, completeness, or suitability of this file or the information provided. You are responsible for how you use this file and its information.		This document is the property of FIND 3D CAD. The information in it may not be copied, shared, or given to any third party without written permission from FIND 3D CAD.	
DESCRIPTION Eight Bore Line 3000 psi Welded Cylinder - Double Acting		TITLE WELDED CYLINDER	
Sheet Size	PART NUMBER	Rev.	ISSUED
A	68012	01	2026-07-20
SCALE: 0.105		Unless otherwise specified Dimensions are in INCHES	