


Part Name:	Date: 06/02/2026
Part #: in (Click to see Part # on Website)	PE026-359-52308-SST-2000-CO-N-IN 
Spring Type: Extension Spring	End Type: Cross-Over Hook
Finish: None	Direction of Wind: Right Hand
Material: Stainless 302 ASTM A313	Spring Index (I): 12.808
Weight / M: 8.812 Lbs	Length of W: 57.428 in

Physical Dimensions	IN	MM	Tolerances (in)
Wire Diameter (WD)	0.026 in	[0.660 mm]	+/- 0.001
Outer Diameter (OD)	0.359 in	[9.119 mm]	+/- 0.008
Mean Diameter (MD)	0.333 in	[8.458 mm]	+/- 0.008
Inner Diameter (ID)	0.307 in	[7.798 mm]	+/- 0.008
Length Inside Hooks (LIH)	2.000 in	[50.800 mm]	+/- 0.050
Body Length (BL)	1.386 in	[35.204 mm]	+/- 0.050
Hook Gap 1 (HG1)	0.026 in	[0.660] mm	
Hook Gap 2 (HG2)	0.026 in	[0.660] mm	
Hook Length 1 (HL1)	0.307 in	[7.798] mm	
Hook Length 2 (HL2)	0.307 in	[7.798] mm	
Total Hook Length (THL)	0.614 in	[15.596] mm	

Spring Rate (K)	0.29424 lbs/in	0.052 N/mm	+/- 0.029
Max Load (ML)	2.043 lbf	9.090 N	+/- 0.204
Max Travel (MT)	6.316 in	160.434 mm	
Initial Tension (IT)	0.185 lbf	0.823 N	
Max Shear Stress Possible (t max)	136770.000 PSI	942995954.964 Pa	
Material Shear Modulus (G)	9949475.938 PSI	68599221788.087 Pa	
Wahl Correction Factor (W)	1.112	1.112	

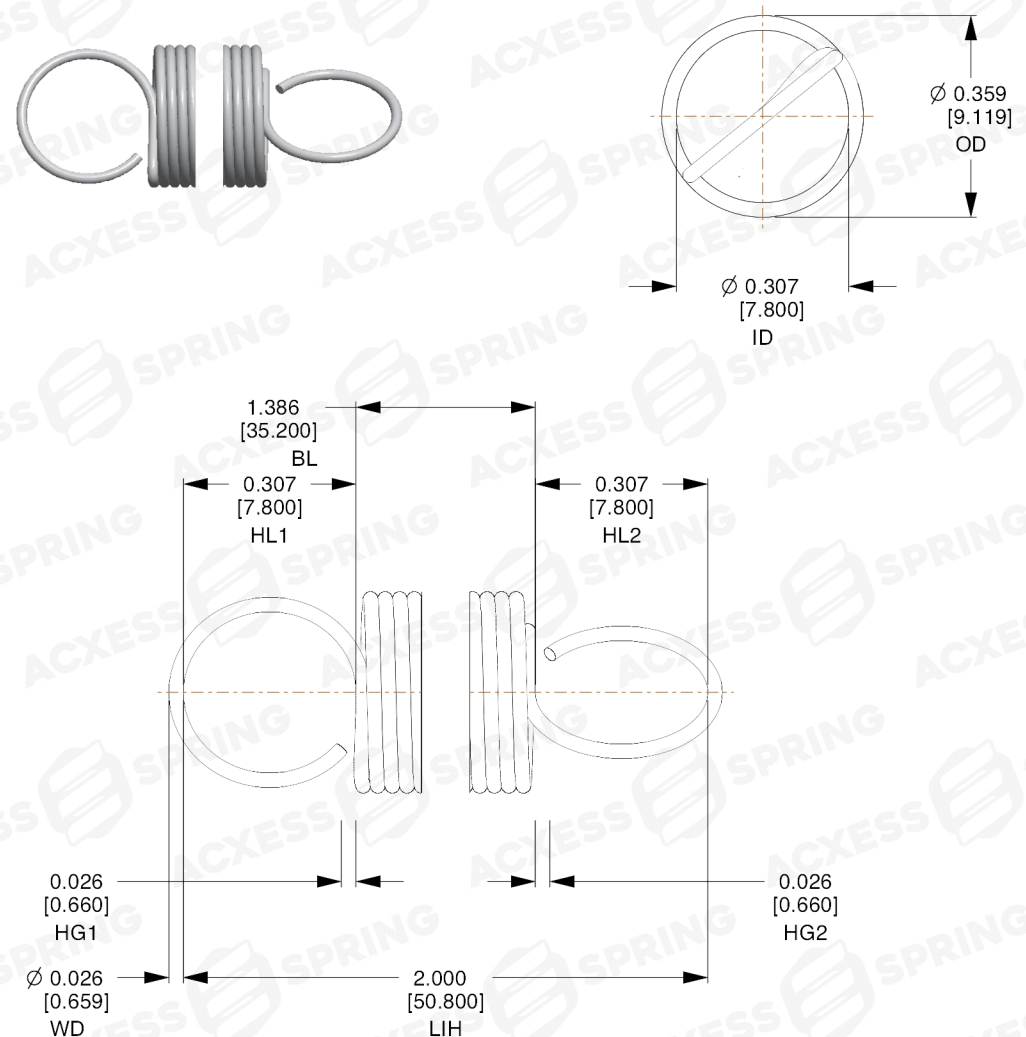

Note: Body Length, Total Coils, End Type and End Position is for reference only.

Notes	Scale: 2.925	Revision #:	Drawn By:	Approved By:
	This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Acxess Spring makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specification.			This Drawing is the property of ACXESS SPRING It may contain confidential, proprietary information, that is Acxess Spring property. Do not disclose to or duplicate for others except as authorized by Acxess Spring.