

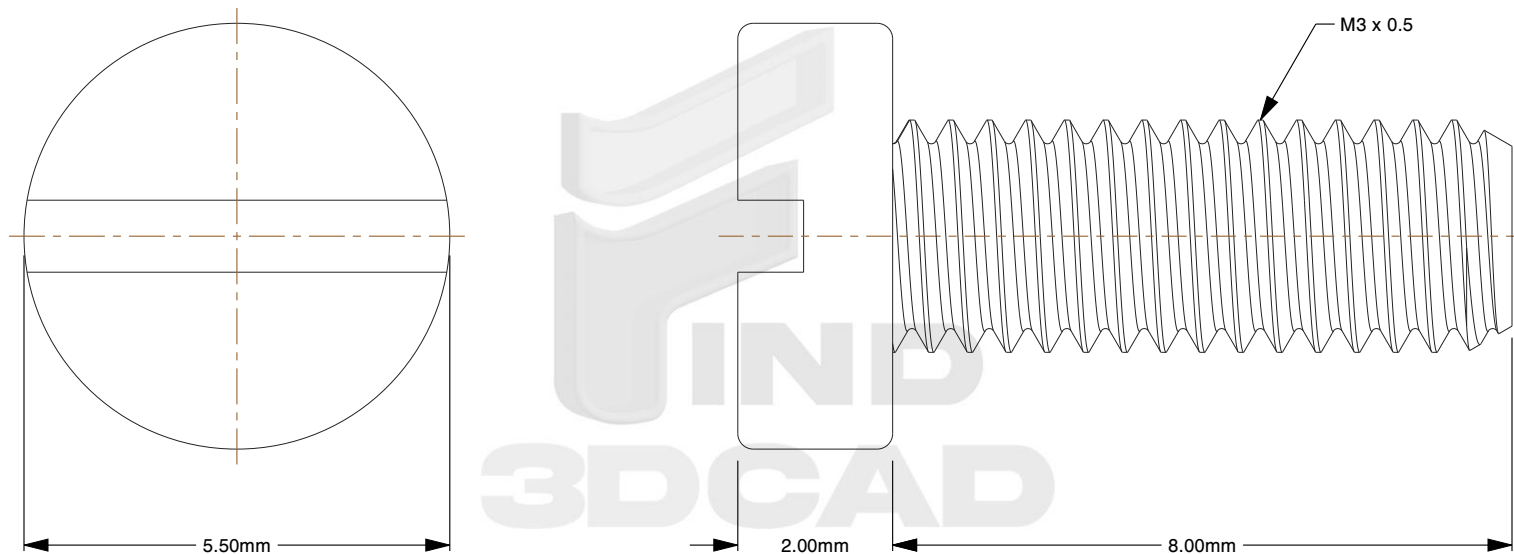


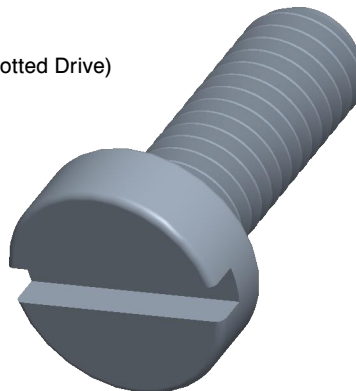

Notes:

1. **Diameter:** M3
2. **Step:** 0.5
3. **Length:** 8MM
4. **Head Diameter:** 5.50MM
5. **Head Height:** 2MM
6. **Grade:** A2-70 (similar to T-304)
7. **Finish:** Natural
8. **Material:** Stainless Steel
9. **Head:** Cylindrical, cheese-type with a straight groove (Slotted Drive)
10. **Thread:** Standard metric
11. **Tensile strength:** 700 N/mm² minimum
12. **Elastic limit:** 450 N/mm² minimum
13. **Hardness:** Approx. 200 HV (Vickers)
14. **Minimum elongation:** 0.2
15. **Carbon (c):** less than or equal to 0.08%
16. **Chromium (Cr):** 17.0 19.5%
17. **Nickel (Ni):** 8.0 10.5%
18. **Manganese (Mn):** less than or equal to 2.0%
19. **Phosphorus (P):** less than or equal to 0.05%
20. **Sulfur (S):** less than or equal to 0.03%



 https://find3dcad.com/		THIRD ANGLE PROJECTION 	
This file and the related information are provided for reference only and may change without notice. FIND 3D CAD does not guarantee the accuracy, completeness, or suitability of this file or the information provided. You are responsible for how you use this file and its information.		This document is the property of FIND 3D CAD. The information in it may not be copied, shared, or given to any third party without written permission from FIND 3D CAD.	
DESCRIPTION Stainless Steel Slotted Cheese Screw - M3 x 8		TITLE Cheese Head Screws	
Sheet Size	PART NUMBER	Rev.	ISSUED
A	TQRIN3X8	01	2026-08-21
SCALE: 10.242		Unless otherwise specified Dimensions are in MILLIMETERS	