
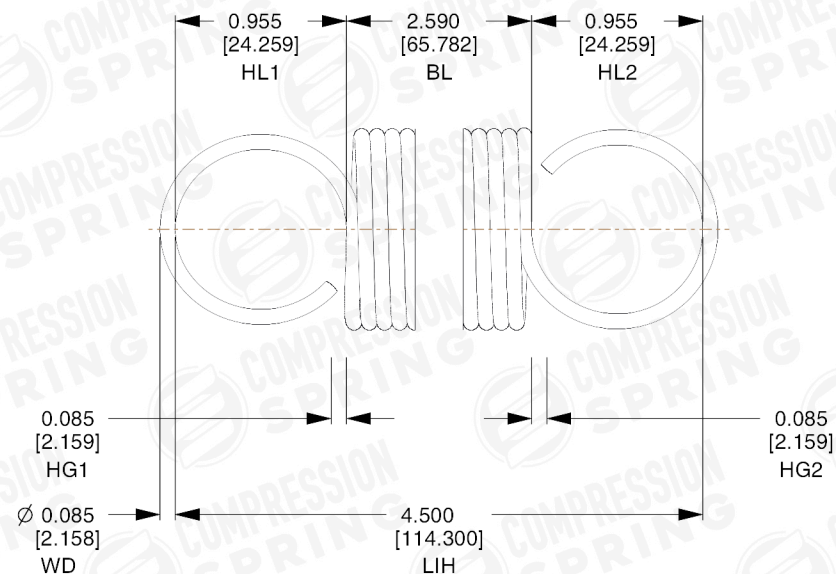
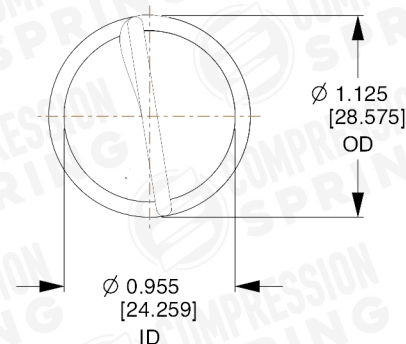


Part Name:	Date: 06/02/2026
Part #: in (Click to see Part # on Website)	PE085-1125-29471-SST-4500-CO-N-IN 
Spring Type: Extension Spring	End Type: Cross-Over Hook
Finish: None	Direction of Wind: Right Hand
Material: Stainless 302 ASTM A313	Spring Index (I): 12.235
Weight / M: 171.767 Lbs	Length of W: 104.734 in

Physical Dimensions	IN	MM	Tolerances (in)
Wire Diameter (WD)	0.085 in	[2.159 mm]	+/- 0.001
Outer Diameter (OD)	1.125 in	[28.575 mm]	+/- 0.020
Mean Diameter (MD)	1.040 in	[26.416 mm]	+/- 0.020
Inner Diameter (ID)	0.955 in	[24.257 mm]	+/- 0.020
Length Inside Hooks (LIH)	4.500 in	[114.300 mm]	+/- 0.200
Body Length (BL)	2.590 in	[65.786 mm]	+/- 0.100
Hook Gap 1 (HG1)	0.085 in	[2.159] mm	
Hook Gap 2 (HG2)	0.085 in	[2.159] mm	
Hook Length 1 (HL1)	0.955 in	[24.257] mm	
Hook Length 2 (HL2)	0.955 in	[24.257] mm	
Total Hook Length (THL)	1.910 in	[48.514] mm	

Spring Rate (K)	1.95838 lbs/in	0.343 N/mm	+/- 0.196
Max Load (ML)	19.226 lbf	85.519 N	+/- 1.923
Max Travel (MT)	8.703 in	221.066 mm	
Initial Tension (IT)	2.181 lbf	9.701 N	
Max Shear Stress Possible (t max)	115620.000 PSI	797171838.217 Pa	
Material Shear Modulus (G)	9949475.938 PSI	68599221788.087 Pa	
Wahl Correction Factor (W)	1.117	1.117	

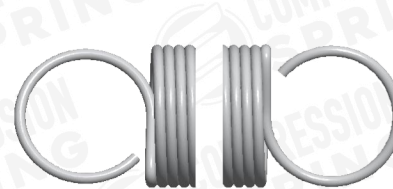

Note: Body Length, Total Coils, End Type and End Position is for reference only.

Notes	Scale: 0.933	Revision #:	Drawn By:	Approved By:
This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Access Spring makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specification.				This Drawing is the property of ACCESS  SPRING It may contain confidential, proprietary information, that is Access Spring property. Do not disclose to or duplicate for others except as authorized by Access Spring.