
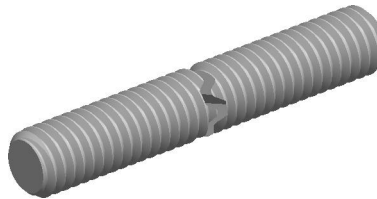


Notes:

1. **Diameter:** M6
2. **Thread pitch:** 1
3. **Length:** 1 Meter
4. **Grade:** 304 (18-8) Stainless Steel
5. **Finish:** Natural
6. **Resistance:** 70,000 PSI
7. **Material:** A2-70 Stainless Steel
8. **Specification:** DIN 975 / ISO 3506
9. **Tensile strength:** greater than or equal to 700 MPa
10. **Elastic limit:** greater than or equal to 450 MPa
11. **Hardness:** HRB 95 max
12. **Minimum elongation:** 0.2
13. **Carbon (c):** less than or equal to 0.08%
14. **Chromium (Cr):** 17 19%
15. **Nickel (Ni):** 8 11%
16. **Phosphorus (P):** less than or equal to 0.045%
17. **Sulfur (S):** less than or equal to 0.03%



 www.torec.mx		THIRD ANGLE PROJECTION 	
This file and the related information are provided for reference only and may change without notice. TOREC Screws does not guarantee the accuracy, completeness, or suitability of this file or the information provided. You are responsible for how you use this file and its information.		This document is the property of TOREC Screws. The information in it may not be copied, shared, or given to any third party without written permission from TOREC Screws.	
DESCRIPTION Stainless Steel Threaded Rod T-304 - M6 X 1 Meter		TITLE Thread Stud	
Sheet Size	PART NUMBER	Rev.	ISSUED
A	VRMIN6	01	2026-09-23
SCALE: 4.064		Unless otherwise specified Dimensions are in MILLIMETERS	